



Mini Box Stacker TFL Series

- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing, from warehouse to office, kitchens, laboratories, retail outlets, etc.
- It's design and small turning radius makes it easier to make sharp turns.
- Controllable direction handle.
- Has a dual pump for easier lifting.



| Model | | TFL150-SL | TFL150-SM | TFL150-LL | TFL150-LM | TFL150-TL | TFL150-TM |
|----------------|----|-----------|-----------|-----------|-----------|-----------|-----------|
| Capacity | kg | 150 | 150 | 150 | 150 | 150 | 150 |
| Lifting Height | mm | 850 | 1200 | 787 | 1137 | 870 | 1220 |
| Min. Height | mm | 70 | 70 | 70 | 70 | 90 | 90 |
| L | mm | 500 | 500 | 650 | 650 | 510 | 510 |
| C | mm | 202 | 402 | 254 | 454 | 240 | 440 |
| D | mm | 280 | 280 | 570 | 570 | 200 | 200 |
| E | mm | 450 | 600 | 450 | 600 | 450 | 600 |
| F | mm | 358 | 508 | 358 | 508 | 358 | 508 |
| G | mm | 953 | 953 | 1045 | 1045 | 953 | 953 |
| K | mm | 536 | 536 | 536 | 536 | 536 | 536 |
| A | mm | 1134 | 1484 | 1134 | 1484 | 1134 | 1484 |
| Net Weight | kg | 51 | 56 | 50 | 55 | 50 | 55 |





Lateral Pallet Tilter LT Series

- The Pallet Tilter is designed to give the user an ergonomically correct position to reach loads easily without the necessary of bending down or stretching up.
- Forks can be tilted up to 20° both left and right sides by thread.
- Supplied as standard with parking brake and foot protectors.
- Conforms to EN 1757-1.



| Model | | LT0892 |
|--------------------|----|-------------------|
| Capacity | kg | 800 |
| Length of fork | mm | 1150 |
| Width of fork | mm | 150 |
| Width over forks | mm | 540 |
| Max.height of fork | mm | 920 |
| Min.height of fork | mm | 88 |
| Tilttable degree | | Left or right 20° |
| Net weight | kg | 210 |

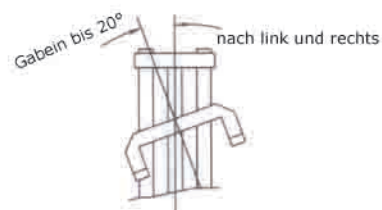

Work Positiners MEC Series

- Stronger motor, Larger battery, Automatic charger, Low voltage protection.
- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height.
- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing, from warehouse to office, kitchens, laboratories, retail outlets, etc.
- Auto brake system prevents uncontrolled lowering.
- Electric models: Automatic electronic overload protection system ensures safety.
- Quick change attachment options available.
- Conforms to EN1757, CE marked.

1KG=2.2LB 1INCH=25.4MM

| Model | | MEC200 |
|-----------------------------------|--------|-------------------|
| Capacity | Q Kg | 200 |
| Lifting height | h3 mm | 1220 |
| Min.platform height | h13 mm | 105 |
| Platform length | L mm | 600 |
| Front roller | mm | Φ75x32 |
| Rear roller | mm | Φ125x32 |
| Overall length | l1 mm | 978 |
| Overall Width | b1 mm | 565 |
| Overall height | h1 mm | 1680 |
| Lifting speed(without/with load) | mm/s | 71/43 |
| Lowering speed(without/with load) | mm/s | 76/81 |
| Lifting motor | | 200W/DC24V |
| Battery | | 15Ah/DC24V |
| Transmission | | By Chain and gear |



Work Positioners MES Series

- Our Lifter/Transporter is the excellent work transporter for Industrial, Laboratory, Office and "White Coat" industrial applications.
- Lightweight duty; Highly manoeuvrable.
- With big advantage in narrow aisles and confined spaces.
- Conforms to EN1757-1 and EN1175-1



| Model | | MES150 | MES150A | MES150B | MES150/801 |
|-------------------------------|--------|--------------|------------|---------|------------|
| Type of operation | Q | hand | | | |
| Load Capacity /rated load | kg | 150 | | | |
| Service Weight | Kg | 58 | 56 | 54 | 60 |
| Tyres | | polyurethane | | | |
| Tyre size, front | | Φ75x32 | | | |
| Tyre size, rear | | Φ100x32 | | | |
| Wheels Qty (x=driven wheels) | | 4 | | | |
| Lowered mast height | h1 mm | 1870 | | | |
| Lift height | h3 mm | 1420 | 1435 | 1440 | 1400 |
| Lowered height | h13 mm | 130 | 115 | 110 | 65 |
| Overall length | L1 mm | 880 | 865 | 920 | 920 |
| Overall width | b1 mm | 520 | 500 | 500 | 801 |
| Fork dimensions | L mm | 460 | 445 | 500 | 500 |
| Width over forks | b5 mm | 520 | 400(Φ40x2) | Φ60 | 650 |
| Travel Speed, laden/unladen | km/h | 4/5.3 | | | |
| Lift speed, laden/unladen | mm/s | 125/156 | | | |
| Lowering speed, laden/unladen | mm/s | 96/89 | | | |

