




Aerial Order Picker DYT Series

- Extra stabilizer and floor brake improved the stability.
- Automatically lifting, thus easy for operating.
- Ideal for picking up goods in supermarket, warehouse .etc.



1KG=2.2LB 1INCH=25.4MM

Model		DYT200-2.7	DYT200-3.3	DYT300-2.7	DYT300-3.3
Lifting Height	mm	2720	3300	2720	3300
Rated Capacity	kg	200	200	200	200
Platform Size	mm	600*600	600*640	600*600	600*640
Overall Size	mm	1300*760*1760	1300*840*2040	1300*760*1760	1300*840*2040
Net Weight	kg	268	313	268	313

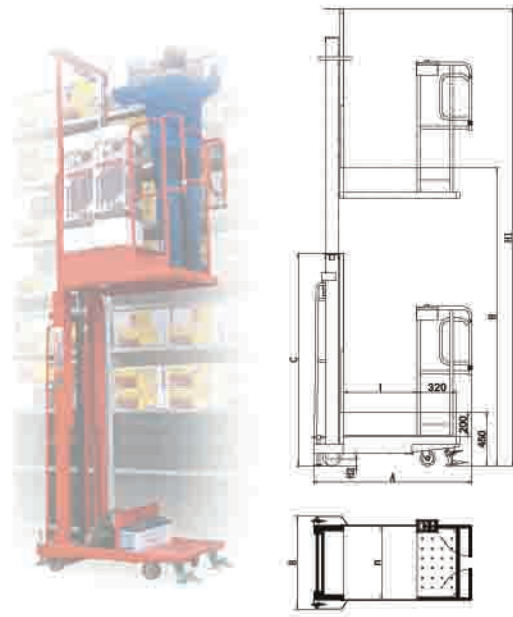

Manual Skid Lifter QSD Series


■ Ideal for your loading and unloading operations, Well-welded heavy steel frame and forks handle weighty loads with ease.

- Combination of pallet truck and lift table.
- Easy-to-use control lever, plus two parking brakes on steering wheels increase safety.
- Ideal for picking up goods in supermarket, warehouse .etc.
- Conforms to EN 1757 -4.





1KG=2.2LB 1INCH=25.4MM

Model		QSD500	QSD1000
Load Capacity	kg	500	1000
Lowest Height	h mm	83	83
Max. Height	H mm	620/900	900
Fork Length	L mm	860/1100	1100
Fork Width	mm	550/685	550/685
Single Fork Width	mm	153	153
Height of Handle	H1 mm	1030	1030
Net.Weight	kg	84/112	90/118
Packing Dimensions	mm	2200x780x1100 685x1100	2200x640x1100 550x1100
Q'ty in one 20'Container	units	72/56	72/56

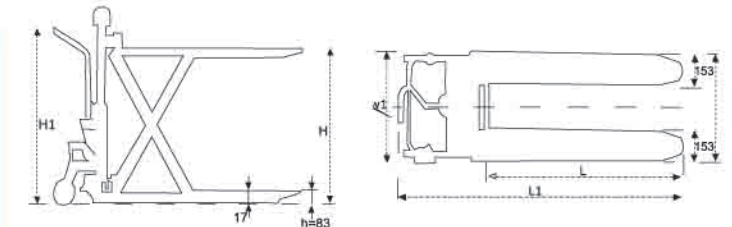

Self-propelled Order Picker ZDYT Series

- Be able to drive at maximum height of platform.
- Maneuverable, extremely easy to use.
- High safety and efficiency.
- Imported top quality electric control system.
- "C" section forks for greatest strength.
- Supplied with battery and automatic charger.
- Conforms to EN-280.

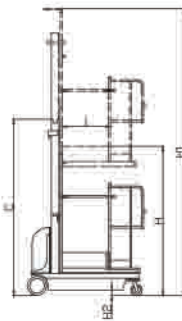

Model		ZDYT300-3	ZDYT300-3.5
Max. Platform Height	H mm	3000	3500
Max. Overall Height	H1 mm	4450	5200
Distance Between Pedestal and Ground	H2 mm	42	42
Platform Loading Capacity	kg	300	300
Working Platform Size	l x n mm	600x640	600x640
Max. Traveling Speed (platform lowered)	km/h	4	4
Max. Traveling Speed (platform lifted)	km/h	1.6	1.6
Min. Turning Radius	mm	1500	1500
Max. Climbing Ability	%	15-20	15-20
Drive Wheel Size	mm	Ø230-250x80	Ø230-250x80
Caster Size	inch	6"	6"
Traveling Motor	v/kw	2x24/0.4-0.5	2x24/0.4-0.5
Lifting Motor	v/kw	2/24	2/24
Battery (service free)	v/kw	2x12/100	2x12/100
Battery Charger	v/A	24/20	24/20
Overall Length	A mm	1550	1550
Overall Width	B mm	700	700
Overall Height	C mm	1950	2200
Net Weight	kg	574	588

1KG=2.2LB 1INCH=25.4MM



Electric Skid Lifter EQSD Series

■ Correctly position skids and work surfaces to minimize back strain.

- Similar to the manual lift table, but with movable in upper position.
- Idea for your loading and unloading operations.
- Continuous-welded heavy steel frame and forks handle weighty loads with ease.
- Easy-to-use control lever, plus two parking brakes on steering wheels increase safety.



1KG=2.2LB 1INCH=25.4MM

Model		EQSD50	EQSD100
Capacity	kg	500	1000
Lowered Height	mm	80	90
Raised Height	mm	900	900
Fork Length	mm	1100	1100
Fork Width	mm	550/685	550/685
Single Fork Width	mm	160	160
Overall Length	mm	1720	1720
Height	mm	1030	1030
Net Weight	kg	155/187	208/220

