




Hand Pallet Truck AC Series



- An economic alternative to the AC, the AC Transpallet Pallet Truck features a quality German design pump for long life and easy field servicing.
- Durable, versatile and easy to use.
- The features an ergonomic design that reduces operator fatigue and downtime.
- A 200 degree handle pivot provides exceptional maneuverability in compact areas and comes with standard polyurethane wheels and rollers for rolling ease.
- AC features a powder coat finish, robotic welds throughout, and grease fittings at all pivot points for easy maintenance.
- This AC can have 3 years warranty, the pump can be black color.



One piece-German style pump



1KG=2.2LB 1INCH=25.4MM

Model	Q	kg	AC20		AC25		AC30		AC20W	AC20L
Capacity			2000	2500	3000	2000	2000			
Min.fork height	H1	mm	85	75	85	75	85	75	75/85	2000
Max.fork height	H2	mm	200	190	200	190	200	190	190/220	
Steering wheel		mm	Φ200x50	Φ180x50	Φ200x50	Φ180x50	Φ200x50	Φ180x50	Φ180x50/Φ200x50	
Load roller Single		mm	Φ82x93	Φ74x93	Φ82x93	Φ74x93	Φ82x93	Φ74x93	Φ74x93/Φ82x93	
Load roller Tandem		mm	Φ82x70	Φ74x70	Φ82x70	Φ74x70	Φ82x70	Φ74x70	Φ74x70/Φ82x70	
Size of fork	e*s	mm	160x50		160x50		160x50		160x50	160x60
Width overall forks	W*2	mm	450/520/540/685				838		540/685	
For*3 length	L *2	mm	800/900/1000/1100/1150/1220				1100/1150/1220		1500/1800/2000/2500/3000	

Hand Pallet Truck CAK Series

- Lighter weight easier rolling design.
- Fully rebuildable pump unit with overload valve.
- Hard chrome-plated lift ram and pump piston.
- Entry & exit ramps for prolonged trouble-free use.
- High strength, one-piece tapered forks with precision size.
- 3 coats stoving-paint.
- Heavy duty ball bearings for lower maintenance.
- Highest quality seals and wipers.
- Easy to use 3-position control lever.




1KG=2.2LB 1INCH=25.4MM

Model	kg	CAK20	CAK25	CAK30	CAK50
Capacity		2000	2500	3000	5000
Min.fork height	H1	mm	80	80	80
Max.fork height	H2	mm	190	190	190
Steering wheel		mm	Φ180x62	Φ180x62	Φ180x62
Load roller Single		mm	Φ78x100	Φ78x100	Φ78x100
Load roller Tandem		mm	Φ78x70	Φ78x70	Φ78x70
Size of fork	B	mm	150x50	150x50	150x50
Width overall forks	A	mm	520/550/685		
Fork length	L	mm	800/900/1000/1100/1150/1220		




CAK full sealed hoist jack

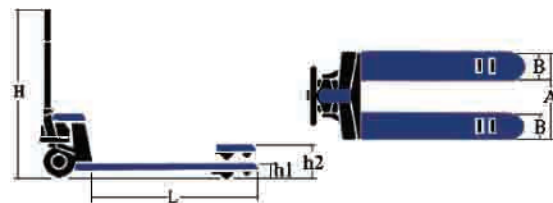

Hand Pallet Truck OKII Series

- Durable and Economical,
- Self-contained hydraulic pallet truck.
- Heavy-gauge steel channel frame with reinforced tapered steel forks designed for smooth pallet entry and exit.
- Premium hydraulic pump with spring-loaded, safety loop handle has a three-position fingertip control (raise/lower/neutral) for fast lifting and efficient moving.




Guide small roller

Handle I


Handle II



OK II hoist Jack

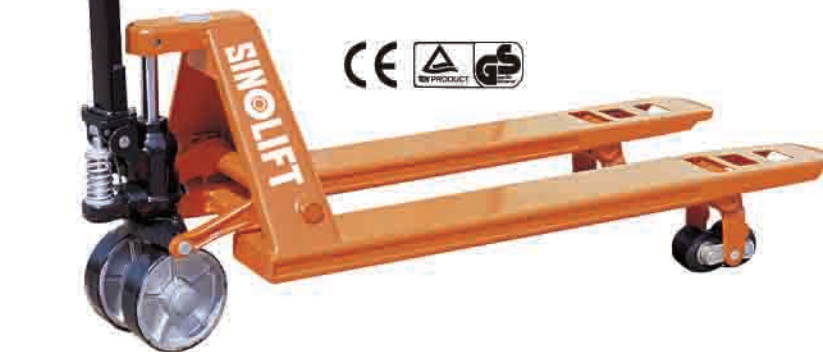

Model		OKII-15		OKII-20	
Capacity	kg	1500		2000	
Min. Height of Forks	mm	80	65	80	65
Max. Height of Forks	mm	200	165	200	165
Steering Wheels	mm	Φ180X50	Φ180X50	Φ180X50	Φ180X50
Load Wheels	Single	mm	Φ78X100	Φ78X100	Φ78X100
	Tandem	mm	Φ78X70	Φ78X70	Φ78X70
Forks Size	mm	150X60			
Forks Width	mm	480 / 520 / 550 / 685			
Forks Length	mm	800/900/1000/1067/1100/1150/1220			

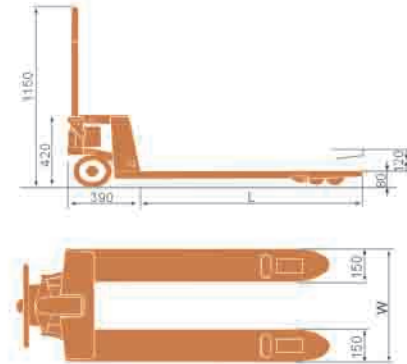

Hand Pallet Truck BL Series

- Features high quality welded steel construction with a durable powder coat finish.
- Japanese design for smaller size pallet openings.

Model		BL20/BL25/BL30	
Capacity	kg/lbs	2000/2500/3000	4500/5500/6600
Fork width	mm	520/550/685	21" /27"
Fork length	mm	1100/1150/1220	36" /42"/ 48"
Lowered height	mm	64/74/85	2.5" /2.9"
Lifting height	mm	200	7-7/8"
Load wheel	mm	Ø80x70 Single / Tandem Nylon / Polyurethane	
Steering wheel	mm	Ø180x70 Nylon / Polyurethane / Rubber	
Weight	kg/lbs	176	180

- 1, With rated capacity on a smooth, dry level concrete floor
- 2, Other fork lengths widths on request

